

03-20-00

A

JC530 U.S. PTO



03/18/00

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

"Certificate of Mailing by "EXPRESS MAIL" Under 37 CFR 1.10"

Express Mail Label No.: EJ708789376US

Deposit Date: 18 MARCH 2000

JC530 U.S. PTO

09/528357



03/18/00

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service with the above Express Mail Label No. on the above Deposit Date addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

ROLAND K. BOWLER II

NEW CONTINUATION PATENT  
APPLICATION TRANSMITTAL LETTER

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Atty. Docket No. 8010-61

SIR:

Transmitted herewith for filing under 35 USC § 111(a) and 37 CFR 1.53 (b)(1) is a patent application entitled

"MELTBLOWING METHOD AND APPARATUS"

by Kui Chiu KWOK, the inventor.

The present application is a continuation application of co-pending U.S. Application No. 09/255,906 filed on 20 February 1999, which is a continuation of U.S. Application No. 08/717,080 filed on 10 October 1996, now U.S. Patent No. 5,902,540, both of which are entitled "Meltblowing Method and Apparatus", from which priority under 35 U.S.C. §120 is hereby claimed.

The enclosed specification, drawings and declaration are true copies of the originals filed in the referenced parent applications.

KWOK  
"Meltblowing Method and Apparatus"  
Atty. Docket No. 8010-61

New Continuation Application

The inventorship of the present application is the same as amended in the referenced parent applications.

The assignment of the present application to Illinois Tool Works Inc. remains the same as in the parent application.

Enclosed are:

- ☒ 37 pages of written Specification and Abstract;
- ☒ 8 sheets of FORMAL Drawing;
- ☒ a Declaration and Power of Attorney;
- ☒ a Preliminary Amendment;
- ☒ an Information Disclosure Statement and Forms PTO-1449 (7 sheets) filed in the parent application; and
- ☒ a check in an amount of \$ 894.00 for the Filing Fee calculated below;

| FEE Calculation                      |                  |         | Extra Claims     | Rate      | Fee       |
|--------------------------------------|------------------|---------|------------------|-----------|-----------|
| Basic Fee                            | (37 CFR 1.16(a)) |         |                  | \$ 690 00 | \$ 690.00 |
| Total Claims                         | (37 CFR 1.16(c)) | 27 - 20 | 7                | \$ 18 00  | \$ 126 00 |
| Independent Claims                   | (37 CFR 1.16(b)) | 4 - 3   | 1                | \$ 78.00  | \$ 78.00  |
|                                      |                  |         | Total Filing Fee |           | \$ 894 00 |
| Assignment Recordal (37 CFR 1.21(h)) | 0                |         |                  | \$ 00 00  | \$ 00.00  |
|                                      |                  |         | TOTAL FEES       |           | \$ 894.00 |

Mail all future correspondence in this application to the Attorney of Record:

**MR. DONALD J. BREH  
GROUP TECHNOLOGY COUNSEL  
ILLINOIS TOOL WORKS INC.  
3600 WEST LAKE AVENUE  
GLENVIEW, IL 60025-5811**

( Continued on the following page. )


KWOK  
"Meltblowing Method and Apparatus"  
Atty. Docket No. 8010-61

New Continuation Application

### **AUTHORIZATION TO DEBIT DEPOSIT ACCOUNT**

The Commissioner for Patents & Trademarks is hereby authorized to debit any additional fees required and to credit any excess fees paid under 37 C.F.R. 1.16 and 1.17 from Deposit Account No. 02-3290 of the undersigned in connection with this application.

Respectfully submitted,



ROLAND K. BOWLER II  
REG No. 33,477

TELEPHONE: 847.229.9966  
FACSIMILE: 847.229.9967

ROLAND K. BOWLER II  
ATTORNEY AT LAW  
50 PICARDY  
WHEELING, ILLINOIS 60090-2107

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**"Certificate of Mailing by "EXPRESS MAIL" Under 37 CFR 1.10"**

**Express Mail Label No.: EJ708789376US**

**Deposit Date: 18 MARCH 2000**

I hereby certify that this correspondence is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service with the above Express Mail Label No. on the above Deposit Date addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Commissioner for Patents, Washington, D.C. 20231.

ROLAND K. BOWLER II

In re application of:

Kui-Chiu KWOK

|           |                 |
|-----------|-----------------|
| Appl. No. | New Application |
|-----------|-----------------|

Filed: 17 March 2000

Atty. Docket No. 8010-61

For: “Meltblowing Method And Apparatus”

# PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Box Patent Application  
Washington D.C. 20231

SIR:

Kindly enter the following amendment before examining the referenced new continuation patent application.

In the Abstract:

Amend the heading of the Abstract to read -- ABSTRACT OF THE DISCLOSURE --.

In the Specification:

Page 1, before the "BACKGROUND OF THE INVENTION", insert

-- CROSS REFERENCE TO RELATED APPLICATIONS

The present application is a continuation of co-pending U.S. Application No. 09/255,906 filed on 20 February 1999, which is a continuation of U.S. Application No. 08/717,080 filed on 10 October 1996, now U.S. Patent No. 5,902,540, issued on 11 May 1999, both of which are fully incorporated herein by reference. --

Page 5, line 13, delete "3a-3s" and insert -- 3a-3t and 3z --

Page 9, line 6, delete "FIG. 2", and insert -- FIG. 2a --.

Page 11, line 28, delete "FIGS. 3, 4" and insert -- FIGS. 3a-3t, 3z, 4a-4f --.

Page 12:

Line 1, delete "FIG. 3" and insert -- FIGS. 3a-3t --;

Line 2, delete "3s" and insert -- in FIG. 3t --; and

Line 26, delete "FIG. 3" and insert -- FIGS. 3a-3t --.

Page 14, line 19, delete "3" and insert -- 3a-3t --.

Page 15, line 27, delete "3-5" and insert -- 3a-3t, 3z, 4a-4f and 5 --; and

Page 19, line 21, after "produce" delete "a".

In The Claims:

Cancel Claims 1- 47 without prejudice.

Add the Following New Claims:

119. A meltblowing system comprising:

a body member having a plurality of first fluid orifices, the body member having a plurality of second fluid orifices, each first fluid orifice flanked on substantially opposing sides by two separate second fluid orifices,

the plurality of first fluid orifices and the plurality of second fluid orifices formed by respective corresponding fluid conduits disposed non-convergently in the body member;

a plurality of filaments, each filament emanating from a corresponding one of the plurality of first fluid orifices, the plurality of filaments each having a predominant vacillation amplitude between the two second fluid orifices on substantially opposing sides of the corresponding first fluid orifice.

120. The system of Claim 119, the plurality of first fluid orifices protruding relative to the plurality of second fluid orifices.

121. The system of Claim 119, two portions of the body member proximate each first fluid orifice devoid of fluid orifices, the two portions of the body member devoid of fluid orifices disposed symmetrically on substantially opposite sides of the corresponding first fluid orifice between the two second fluid orifices on substantially opposite sides thereof

122. A meltblowing system comprising:  
a meltblowing apparatus;  
a moving substrate adjacent the meltblowing apparatus; and  
a filament between the meltblowing apparatus and the moving substrate, the filament having a predominant vacillation amplitude non-parallel to a direction of the moving substrate.

123. The system of Claim 122, the filament having a predominant vacillation amplitude substantially transverse to a direction of the moving substrate.

124. The system of Claim 122, the filament having a substantially periodic vacillation.

125. The system of Claim 122, the vacillation amplitude of the filament greater toward the moving substrate.

5 126. The system of Claim 122, the meltblowing apparatus comprising a body member having a first fluid orifice and two separate second fluid orifices disposed on substantially opposing sides of the first fluid orifice, the first fluid orifice protruding relative to the second fluid orifices, the first and second fluid orifices formed by respective corresponding fluid conduits disposed non-convergently in the body member, the first and second fluid orifices aligned non-parallel to the direction of the moving substrate.

127. The system of Claim 126, the first and second fluid orifices aligned substantially transversely to the direction of the moving substrate.

128. The system of Claim 126, the filament emanating from the first fluid orifice, the predominant vacillation amplitude of the filament between the second fluid orifices on opposing sides of the first fluid orifice.

129. The system of Claim 122, a plurality of filaments between the meltblowing apparatus and the moving substrate, at least some of the plurality of filaments having a predominant vacillation amplitude non-parallel to the direction of the moving substrate.

130. The system of Claim 129, at least some of the plurality of filaments having a predominant vacillation amplitude substantially transverse to the direction of the moving substrate.



131. The system of Claim 129, at least some of the plurality of filaments having a substantially periodic vacillation.

132. The system of Claim 129, the vacillation amplitude of the plurality of filaments greater toward the moving substrate.

133. The system of Claim 129, the meltblowing apparatus comprising a body member having a plurality of first fluid orifices and a plurality of second fluid orifices, the plurality of first fluid orifices protruding relative to the plurality of second fluid orifices, the plurality of first fluid orifices each flanked on substantially opposing sides by two separate second fluid orifices, the plurality of first fluid orifices and the plurality of second fluid orifices are formed by respective corresponding fluid conduits disposed non-convergently in the body member, at least some of the plurality of first and second fluid orifices aligned non-parallel to the direction of the moving substrate.

134. The system of Claim 133, at least some of the plurality of first and second fluid orifices aligned substantially transversely to the direction of the moving substrate.

135. The system of Claim 133, the plurality of filaments emanating from a corresponding one of the plurality of first fluid orifices, the predominant vacillation amplitude of each filament is between the two second fluid orifices disposed on substantially opposing sides of the corresponding first fluid orifice.

136. The system of Claim 133, a plurality of at least two meltblowing apparatuses positioned adjacently, at least some of the plurality of first and second fluid orifices of each meltblowing apparatus aligned with at least some of the plurality of first and second fluid orifices of an adjacent meltblowing apparatus.

137. The system of Claim 133, the body member comprising a plurality of laminated members including at least two plates.

138. A meltblowing apparatus comprising:  
a first fluid orifice in a body member;  
two second fluid orifices in the body member, the two second fluid orifices disposed symmetrically on substantially opposite sides of the first fluid orifice,  
the first and second fluid orifices each have a corresponding fluid conduit disposed in the body member,  
two portions of the body member proximate the first fluid orifice devoid of fluid orifices, the two portions of the body member devoid of fluid orifices disposed symmetrically on substantially opposite sides of the first fluid orifice between the two second fluid orifices.

139. The apparatus of Claim 138 further comprising in combination therewith a filament emanating from the first fluid orifice, the filament having a major vacillation amplitude between the two second fluid orifices on substantially opposite sides of the first fluid orifice.

140. The apparatus of Claim 139, the filament having a minor vacillation amplitude between the portions of the body member devoid of fluid orifices.

141. The apparatus of Claim 138, the first and second fluid orifices disposed on a fluid dispensing face of the body member.

142. The apparatus of Claim 141, the first fluid orifice protrudes relative to the second fluid orifices.

143. The apparatus of Claim 138,  
a plurality of first fluid orifices in the body member and a plurality of second fluid orifices in the body member,

the plurality first and second fluid orifices each have a corresponding fluid conduit disposed in the body member,

each first fluid orifice having two second fluid orifices disposed symmetrically on substantially opposite sides thereof,

two portions of the body member proximate each first fluid orifice devoid of fluid orifices, the two portions of the body member devoid of fluid orifices disposed symmetrically on substantially opposite sides of the corresponding first fluid orifice between the two second fluid orifices on substantially opposite sides thereof.

144. A meltblowing apparatus comprising:  
a first fluid orifice in a body member;

5 two second fluid orifices in the body member, the two second fluid orifices disposed symmetrically on not more than two substantially opposite sides of the first fluid orifice,

the first and second fluid orifices each have a corresponding fluid conduit disposed in the body member.

145. The apparatus of Claim 144, two portions of the body member proximate the first fluid orifice devoid of fluid orifices, the two portions of the body member devoid of fluid orifices disposed symmetrically on substantially opposite sides of the first fluid orifice between the two second fluid orifices.

146. The apparatus of Claim 144,  
a plurality of first fluid orifices in the body member and a plurality of second fluid orifices in the body member,

5 the plurality first and second fluid orifices each have a corresponding fluid conduit disposed in the body member,

each first fluid orifice having two second fluid orifices disposed symmetrically on not more than two substantially opposite sides thereof.

147. The apparatus of Claim 146, two portions of the body member proximate each first fluid orifice devoid of fluid orifices, the two portions of the body member devoid of fluid orifices disposed symmetrically on substantially opposite sides of the corresponding first fluid orifice between the two second fluid orifices on substantially opposite sides thereof.

## REMARKS

Kindly enter this Preliminary Amendment prior to examination of the pending application.

The specification has been amended grammatically and idiomatically consistent with the amendments made thereto in the parent application.

Original Claims 1-47 have been canceled, and new Claims 119-147 have been added for consideration by the Examiner.

New Claim 119 is drawn to a "meltblowing system" comprising a "body member having a plurality of first fluid orifices" and a "plurality of filaments ... emanating from a corresponding one of the plurality of first fluid orifices ...." New Claims 120 and 121 depend from Claim 119 and recite limitations not previously considered.

New Claim 119 corresponds generally to former Claim 56 in the parent application, which was drawn to "a plurality of filaments" in combination with a "meltblowing apparatus" recited in a base claim from which Claim 56 was dependent.

New Claims 122-137 correspond generally to former Claims 66-81 in the parent application which were drawn generally to a "system" comprising a "... filament between the meltblowing apparatus and the moving substrate, the filament having a predominant vacillation amplitude non-parallel to the direction of the moving substrate."

Claims 120-121 and 138-147 are newly submitted for consideration.

No new matter has been added.

### **Response to Rejection Under 35 U.S.C. § 112**

In the Official action 29 July 1999, former Claims 56, 67-69, 73-76 and 79 were rejected under 35 U.S.C. § 112, second paragraph for failure to "... positively recite any

apparatus structure (the filament and its characteristics form no part of the apparatus) ...." The Examiner alleged more particularly that the "filaments" do "... not further limit the apparatus claims principally because this limitation [the "filament"] does not further limit the physical structure of the apparatus." Official action of 22 December 1999, page 4, para. 9. This rejection was maintained in the Advisory action of 8 February 2000, wherein the applicants' contrary arguments were dismissed as being non-persuasive.

It is noted initially that the basis for the Examiner's rejection under 35 U.S.C. § 112, second paragraph, is not clear. More particularly, the Examiner does not allege that the "filament" limitations are indefinite. Rather, as noted, the Examiner merely alleges that the "filaments" do "... not further limit the physical structure of the apparatus." Official action, 22 December 1999, page 4, para. 9.

The Applicants hereby requests that the Examiner state with greater particularity whether the rejection is for indefiniteness or for the failure to claim what applicants regard as the invention. *Ex parte Ionescu*, 222 USPQ 537, 539 (Bd. App. 1984) (The Examiner must explain whether a rejection based on 35 U.S.C. § 112, second paragraph, is for indefiniteness or the failure to claim what applicants regard as the invention.); M.P.E.P. § 2171.

It is submitted, that Claims 119-137 particularly point out and distinctly claim the subject matter of the invention in compliance with 35 U.S.C. 112, second paragraph. Particularly, the location and orientation of the "filament" limitations relative to the "body member" or "apparatus" are clear, concise and unambiguous and therefore not indefinite.

The "filaments" limitations are statutory structure under 35 U.S.C. § 101, as conceded by the Examiner, and thus are properly recited in combination with the other structural limitations recited in the claims, namely the "body member" of Claim 119 and the "apparatus" of Claims 123-125, 129-132 and 135.

Stated otherwise, the Claims are drawn to a combination of statutory subject matter. Claim 119 is drawn to a "body member" in combination with a "... plurality of filaments emanating from a corresponding one of the plurality of first fluid orifices [of the

body member], the plurality of filaments having a predominant vacillation amplitude between the two second fluid orifices on substantially opposing sides of the corresponding first fluid orifice.” Claim 122 is drawn to a “meltblowing apparatus” in combination with a “moving substrate” and a “filament between the meltblowing apparatus and the moving substrate, the filament having a predominant vacillation amplitude non-parallel to a direction of the moving substrate.”

The “filament” limitations need not “... further limit the physical structure of the apparatus ...” per se, as suggested by the Examiner. As noted above, the “filament” limitations are claimed *in combination* with the other limitations and limit the claims as a whole. *W.L. Gore & Assoc. v. Garlock, Inc.* 721 F.2d 1540, 220 USPQ 303 (Fed. Cir. 1983) (The claims must be considered as a whole.). In Claim 122, for example, the “moving substrate” limitation does not further limit the physical structure of the “apparatus”, yet the “substrate” limitation is not subject to a rejection for indefiniteness.

The Examiner’s allegation that the Claims are not in compliance with 35 U.S.C. 112, second paragraph, merely because the “filament” limitations (the location and orientation of which are otherwise clearly recited in the claims) do not further limit the physical structure of some other limitation in the claimed combination is thus improper and must be withdrawn.

For the reasons set out above and in the remarks of 27 September 1999 and of 21 January 2000, it is submitted Claims 119-125, 129-132 and 135 particularly point out and distinctly claim the subject matter of the invention in compliance with 35 U.S.C. 112, second paragraph, and that said rejections must be withdrawn.

### **Patentability of Claims Over U.S. Patent No. 5,667,750 (Nohr)**

In the Official action 29 July 1999, former Claims 66-69 and 73-76 were rejected under 35 U.S.C. § 102(e) as being anticipated by U.S. Patent No. 5,667,750 (Nohr).

The Examiner alleged more particularly that Nohr “... teaches a meltblowing system (apparatus) including a meltblowing apparatus and a moving substrate. Official Action of 22 December 1999, page 3, para. 6.

Nohr however fails to disclose or suggest a “... filament having a predominant vacillation amplitude non-parallel to a direction of the moving substrate” as recited in new Claims 122-125 and 129-132, and the Examiner makes no allegation otherwise.

The Examiner acknowledges this deficiency of Nohr, but alleges that “... [t]he filament (and its characteristics) form no part of the apparatus structure”, Official Action, 22 December 1999, page 3, para. 6, and on this basis, the Examiner disregards the “filament” limitations in the formulation of the rejection for anticipation by Nohr under 35 U.S.C. § 102.

The Examiner however must consider the claims as a whole and give patentable weight to each and every limitation thereof, *W.L. Gore & Assoc. v. Garlock, Inc.* 721 F.2d 1540, 220 USPQ 303 (Fed. Cir. 1983), including the “filament having a predominant vacillation amplitude non-parallel to a direction of the moving substrate” of the subject Claims. Moreover, a claim is anticipated only if each and every limitation recited therein is disclosed in a single reference. *Verdegael Bros. V. Union Oil Co. of California*, 2 USPQ2d 1051, 1053.

And since Nohr does not disclose a “filament having a predominant vacillation amplitude non-parallel to a direction of the moving substrate”, the Examiner’s has not stated a *prima facie* case for anticipation under 35 U.S.C. § 102. For these reasons, the rejections of the Claims for anticipation by Nohr are improper and must be withdrawn.

For these reasons and those set forth in the remarks of 27 September 1999 and 21 January 2000, Claims 122-125 and 129-135 are believed to be patentably distinguished and allowable over Nohr.

(Continued on the following page.)



**Allowed and Allowable Claims**


Former Claims 56 and 79 (corresponding to new Claims 119 and 135 of the present application) were indicated as being allowable if rewritten to overcome the objection under 35 U.S.C. 112, second paragraph. In view of the discussion above regarding the rejection under § 112, Claims 119 and 135 of the present application are also believed to be in condition for allowance.

Former Claims 70-72, 77, 78, 80 and 81 (corresponding to new Claims 126-128, 133, 134 and 135 of the present application) were indicated as being allowable if rewritten to include the limitations of the base and any intervening claims. In view of the discussion above regarding the patentability of the antecedent claims, Claims 126-128, 133, 134 and 135 of the present application are also believed to be in condition for allowance.

Kindly withdraw any rejections and objections and allow the pending claims of the present application to issue as a United States Patent.

The undersigned requests a telephone interview upon the Examiner's carefully reviewing this amendment and before preparing an Official action in response thereto.

Respectfully submitted,

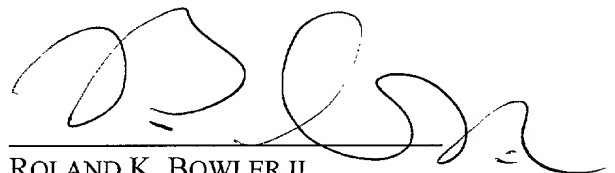

ROLAND K. BOWLER II  
REG. NO. 33,477

TELEPHONE 847.229.9966  
FACSIMILE 847.229.9967

ROLAND K. BOWLER II  
ATTORNEY AT LAW  
50 PICARDY  
WHEELING, ILLINOIS 60090-2107

# MELTBLOWING METHOD AND APPARATUS

## BACKGROUND OF THE INVENTION

5           The invention relates generally to meltblowing processes and to die assemblies for practicing meltblowing processes, and more particularly to die assemblies with a plurality of adhesive dispensing orifices flanked on each side by air dispensing orifices, wherein adhesive flows from the plurality of adhesive dispensing orifices are drawn and attenuated by relatively high velocity, high temperature air flows from the air dispensing orifices to form adhesive filaments.

10           Meltblowing is a process of forming fibers or filaments by drawing and attenuating a first fluid flow, like molten thermoplastic, with shear forces from an adjacent second fluid flow, like heated air, at high velocity relative to the first fluid flow. These meltblown filaments may be continuous or discontinuous, and range in  
15 size between several tenths of a micron and several hundreds of microns depending on the meltblown material and requirements of a particular application. The applications for meltblowing processes include, among others, the formation of non-woven fabrics and the dispensing of meltblown adhesive materials for bonding  
20 substrates in the production of a variety of bodily fluid absorbing hygienic articles like disposable diapers and incontinence pads, sanitary napkins, patient underlays, and surgical dressings.

25           In U.S. Patent No. 5,145,689 entitled "Meltblowing Die" issued on 8 September 1992 to Allen et al., for example, an elongated die assembly includes a triangular die tip defined by converging surfaces that form an apex with a plurality of orifices arranged in a series therealong. A continuous air passage formed by air plates disposed along and spaced apart from the converging surfaces of the die tip directs  
30 converging sheets of high temperature, high velocity air along the converging surfaces of the die tip toward the apex where the high velocity air draws and attenuates polymer flows dispensed from the plurality of orifices. The U.S. Patent No. 5,145,689 also discloses an actuatable valve assembly located upstream of the plurality of orifices

to selectively control the polymer flow to the orifices in the die tip.

5 The inventors of the present invention recognize that compressing and heating air required for forming meltblown adhesives and other filaments is an expensive aspect of the meltblowing process. The inventors recognize also that drawing and attenuating fluid dispensed from a series of orifices in a die with converging air flow sheets disposed along opposing sides of the series of orifices is an inefficient configuration for meltblowing processes that require substantial amounts of compressed air, which is costly. More specifically, a substantial portion of each air sheet contributes very little to the meltblowing process since only those portions of the air sheet proximate the opposing flanking sides of the individual fluid flows has any significant affect on the drawing and attenuation of the dispensed fluid. Also, only the shear component of the converging air flow sheets, which is parallel to the dispensed fluid flow direction, contributes to the drawing and attenuation of the dispensed fluid. The compressive component of the converging air flow sheets, which flows perpendicular to the dispensed fluid flow direction, does not contribute to the drawing and attenuation of the dispensed fluid. The inventors recognize further that maximizing the shear component of the air flow will maximize the rate at which the meltblown material is drawn and attenuated and reduce the required amounts of compressed air, which results in reduced production costs.

20 The inventors of the present invention recognize that any residual fluid along a fluid supply conduit between an actuatable fluid supply control valve and a fluid dispensing orifice has a tendency to continue to flow from the fluid dispensing orifice after the fluid supply has been terminated. In applications that require accurate dispensing of a meltblown fluid including the application of meltblown adhesives onto substrates, however, any continued fluid flow from the fluid orifice after the fluid supply is terminated is highly undesirable. The inventors recognize also that it is necessary in many meltblown adhesive applications, including the manufacture of bodily fluid absorbing hygienic articles, to uniformly produce and apply the meltblown

5 filaments. More specifically, it is necessary to apply a consistent layer of meltblown material onto a substrate or other surface and to produce a well defined interface or boundary between areas covered and areas not covered by the meltblown material. In the production of bodily fluid absorbing hygienic articles, for example, accurate control over the application of meltblown adhesives onto specific areas of a substrate is absolutely necessary since only designated portions of the substrate require bonding whereas other areas either do not require bonding or are discarded as waste.

10 The inventors of the present invention recognize further that prior art manufacture and fabrication of meltblowing dies limits the scope meltblowing applications for which the dies may be used. More specifically, many meltblowing dies require precision machining techniques to fabricate the often very small diameter fluid dispensing orifices and other features of the die. For some applications the die fabrication requirements are at the limits of existing technologies, and in many other applications the die fabrication requirements are cost prohibitive.

15 In view of the discussion above among other considerations, there exists a demonstrated need for an advancement in the art of meltblown processes and apparatuses for practicing meltblowing processes.

20 It is therefore an object of the invention to provide novel meltblowing methods and novel apparatuses for practicing meltblowing methods that overcome problems in the prior art.

It is also an object of the invention to provide novel meltblowing methods and apparatuses that are economical and useable for applying meltblown adhesives onto substrates in the production of bodily fluid absorbing hygienic articles.

25 It is another object of the invention to provide novel meltblowing methods and apparatuses that reduce amounts of fluid required for forming meltblown filaments, and in particular for reducing amounts of air required for drawing and attenuating meltblown adhesive filaments.

It is another object of the invention to provide novel meltblowing

methods and apparatuses for eliminating residual fluid flow from fluid dispensing orifices of a body member after terminating fluid supplied to the orifices.

It is another object of the invention to provide novel meltblowing methods and apparatuses for controlling application of meltblown filaments, and more particularly for selectively controlling dispensed fluid mass flow rates, and for selectively controlling dispensed fluid vacillation parameters, and for selectively controlling patterns of meltblown filaments applied onto a substrate including edge definition of the meltblown filaments.

It is yet another object of the invention to provide a novel meltblowing die assembly comprising a plurality of laminated members for distributing first and second fluids to corresponding first and second orifices arranged in an alternating series, wherein each of the first orifices is flanked on both substantially opposing sides by one of the second orifices, and wherein the first and second fluid flows are directed substantially non-convergently.

It is still another object of the invention to provide a novel meltblowing die assembly comprising a plurality of laminated members or plates for distributing first and second fluids to corresponding first and second orifices arranged in an alternating series of first and second orifices, wherein each first orifice and a second orifice disposed on both substantially opposing sides of the first orifice form an array of fluid dispensing orifices, and wherein a plurality of at least two arrays are arranged either collinear, or parallel, or non-parallel to each other in the meltblowing die assembly.

It is another object of the invention to provide a novel meltblowing die assembly mountable on a die adapter assembly which supplies fluids to the die assembly, wherein a plurality of at least two die adapter assemblies are arranged adjacently to form an array of adjacent die assemblies.

These and other objects, features and advantages of the present invention will become more fully apparent upon consideration of the following

Detailed Description of the Invention with the accompanying Drawings, which may be disproportionate for ease of understanding, wherein like structure and steps are referenced by corresponding numerals and indicators.

### BRIEF DESCRIPTION OF THE DRAWINGS

5                   FIG. 1 is a diagrammatic view of an exemplary meltblowing process according to one aspect of the present invention.

                  FIG. 2a is a partial sectional view of a meltblowing die for practicing meltblowing processes according to several other aspects of the present invention.

10                  FIG. 2b is a perspective view of a meltblowing die having a plurality of arrays of fluid dispensing orifices arranged in configurations according to several exemplary embodiments of the invention, wherein each array includes a first orifice flanked on both substantially opposing sides by a second orifice.

                  FIGS. 3a-3s represent individual plates of a die assembly or body member according to an exemplary embodiment of the invention.

15                  FIGS. 4a-4f represent a partial exploded view of an exemplary die assembly or body member comprising several individual plates of FIGS. 3.

                  FIG. 5 is a perspective view of an exemplary partially assembled die assembly comprising several individual plates of FIG. 3.

20                  FIG. 6 is a partial perspective view of a portion of an exemplary die assembly comprising several individual plates of FIG. 3.

                  FIG. 7 represents a partial perspective view of an exemplary die adapter assembly for coupling with the exemplary die assemblies of FIGS. 3-5.

## DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 is a diagrammatic view of a meltblowing process or method wherein a first fluid is dispensed to form a fluid flow F1 at a first velocity and a second fluid is dispensed to form separate second fluid flows F2 at a second velocity along substantially opposing flanking sides of the first fluid flow F1. According to this configuration, the first fluid flow F1 is located between the separate second fluid flows F2, wherein the substantially opposing sides of the first fluid flow F1 are each flanked by the second fluid flows F2 to form an array of fluid flows as shown in FIG. 1. The second velocity of the second fluid flows F2 is greater than the first velocity of the first fluid flow F1 so that the second fluid flows F2 draw and attenuate the first fluid flow F1 to form a first fluid filament FF. The length of the arrows F1 and F2 is indicative of, though not proportional to, the relative velocities therebetween. The first fluid flow F1 and the second fluid flows F2 are directed generally non-convergently. FIG. 1 shows the first fluid flow F1 and flanking second fluid flows F2 directed in parallel, which maximizes the drawing effect of the shear component of the second fluid flows F2 on the first fluid flow F1. In other embodiments, however, it may be advantageous to divergently direct the first fluid flow F1 and the second fluid flows F2 to control application or dispensing of the fluid filament FF without substantially adversely affecting the shear component of the second fluid flows F2 available for drawing the first fluid flow F1.

The method may be practiced, more generally, by dispensing the first fluid to form a plurality of first fluid flows F1 at the first velocity and dispensing the second fluid to form a plurality of second fluid flows F2 at the second velocity, wherein the plurality of first fluid flows F1 and the plurality of second fluid flows F2 are arranged in an alternating series so that each of the plurality of first fluid flows F1 is flanked on substantially opposing sides by one of the plurality of second fluid flows F2. According to this configuration, each of the plurality of first fluid flows F1 in the

alternating series has one of the plurality of second fluid flows F2 on substantially opposing sides of the first fluid flow F1. The second velocity of the plurality of second fluid flows F2 is greater than the first velocity of the plurality of first fluid flows F1 so that the plurality of second fluid flows F2 draws and attenuates the plurality of first fluid flows F1 to form a plurality of first fluid filaments FF. The plurality of first fluid flows F1 and the plurality of second fluid flows F2 along the substantially opposing flanking sides of the first fluid flows F1 are directed generally non-convergently as discussed above. According to this mode of practicing the invention, the arrangement of the plurality of first and second fluid flows in an alternating series utilizes relatively effectively the shear component of the plurality of second fluid flows F2 for drawing and attenuating the plurality of first fluid flows F1 to form the plurality of first fluid filaments.

FIG. 1 shows the first fluid flow F1 including the first fluid filament FF vacillating under the effect of the flanking second fluid flows F2, which vacillation is attributable generally to instability of the fluid flows. The first fluid flow vacillation is characterizeable generally by an amplitude parameter and a frequency parameter, which are variable. The vacillation may be controlled, for example, by varying a spacing between the first fluid flow F1 and one or more of the flanking second fluid flows F2, or by varying an amount of one or more of the second fluid flows F2, or by varying a velocity of one or more of the second fluid flows F2. The frequency parameter of the vacillation is controlled generally by varying a velocity of the second fluid flows F2 relative to the velocity of the first fluid flow F1. The amplitude of the vacillation is controlled generally by varying a spacing between the first fluid flow F1 and the second fluid flows F2, or by varying the flow volumes or quantity of the second fluid flows F2. The symmetry of the vacillation is controlled generally by varying one of the second fluid flows F2 relative to the other of the second fluid flows F2. Control over vacillation symmetry is an effective means for controlling the edge profile or edge definition of the first fluid filament in some applications as further



discussed below. These methods for controlling vacillation parameters of the first fluid flow F1 are also applicable to controlling vacillation parameters of a plurality of first fluid flows and the corresponding plurality of first fluid filaments.

FIG. 2a is a partial sectional view of an exemplary meltblowing die or body member 10 for practicing processes according to the present invention. Generally, the first fluid is dispensed from a first orifice 12 of the body member to form the first fluid flow F1, and the second fluid is dispensed from second orifices 14 to form separate second fluid flows F2 flanking substantially opposing sides of the first fluid flow F1 to form an orifice array 30, one of which is referenced in FIG. 2b. More generally, the body member 10 may include a plurality of first orifices 12 each flanked on substantially opposing sides by one of a plurality of second orifices 14 to form the alternating series of first and second fluid flows discussed above. And still more generally, the body member 10 may include a plurality of at least two arrays of orifices each formed by a first orifice and second orifices on substantially opposing sides of the first orifice. FIG. 2b, for example, shows a body member 10 having plurality of at least two orifice arrays 30 in a several exemplary configurations. According to one configuration, a common surface 11 of the body member 10 includes a first orifice array 32 and a second orifice array 34 arranged in parallel, though not necessarily collinear, to provide staggered first fluid filaments FF that vacillate in substantially parallel planes, only one of which is shown for clarity. In a more particular configuration, the fluid filaments FF produced by the staggered orifice arrays 32 and 34 may be controlled to overlap slightly. In another configuration, one orifice array 36 is oriented at an angle relative to one of the other orifice arrays 32 or 34 to provide first fluid filaments FF that vacillate in intersecting planes as shown. And in another configuration, one or more orifice arrays 30 and 38 are located on other surfaces 13 and 19 of the body member 10 relative to other orifice arrays 32, 34, and 36 to provide a three dimensional fluid filament distribution. These exemplary basic configurations may also be combined to produce still other configurations.

FIG. 2a shows one of the second orifices recessed in an aperture 15 of the body member 10 relative to the first orifice 12. According to this configuration, the recessed second orifice 14 prevents upward migration of first fluid flow from the first orifice 12 into the second orifice 14 to prevent obstruction thereof. In one embodiment, both of the plurality of second orifices 14 on each substantially opposing side of the first orifice 12 is recessed relative to the first orifice 12. FIG. 2 also shows the aperture 15 having an increasing taper extending away from the second orifice 14, which forms a tapered aperture 17. According to this alternative configuration, the tapered aperture 17 prevents upward migration of first fluid flow F1 from the first orifice 12 into the second orifice 14, as discussed above. The tapered aperture 17 also modifies the second fluid flow F2, for example, by broadening or increasing the cross sectional area of the second fluid flow F2. In another embodiment, both of the plurality of recesses 15 on substantially opposing sides of the first orifice 12 has an increasing taper to form a tapered aperture 17 as discussed above. Generally, the first and second orifices 12 and 14 of the body member 10 may have any cross sectional shape including circular, rectangular and generally polygonal shapes.

In one mode of practicing the invention shown in FIG. 2a, a high pressure zone 16 is generated proximate an output of the first orifice 12 with converging separate third fluid flows F3 to block residual first fluid flow from the first orifice 12 after a first fluid supply has been terminated. According to this aspect of the invention, the converging third fluid flows F3 are convergently directed from either the same side or from opposing sides of the series of first and second fluid flows F1 and F2 so that the converging third fluid flows F3 meet to form the high pressure zone 16 proximate the output of the first orifice 12. Alternatively, the high pressure zone 16 may be formed by deflecting or otherwise converging the second fluid flows F2, wherein the deflected second fluid flows F2 form the converging third fluid flows F3. In the preferred configuration, the converging third fluid flows F3 that form the high pressure zone 16 proximate the output of the first orifice 12 do not have a component

of third fluid flow F3 in the direction of the first fluid flow F1 to ensure that residual first fluid flow is blocked. This process of converging third fluid flows F3 to form high pressure zones 16 proximate the first orifice 12 for blocking residual first fluid flow after the first fluid supply has been terminated is also applicable to blocking residual first fluid flow from each of a plurality of first orifices, wherein a corresponding high pressure zone 16 is generated proximate an output of each of the plurality of first orifices.

In another mode of practicing the invention shown in FIG. 2a, separate first fluid flows F11 and F12 are formed from the first orifice 12 by dispensing the first fluid through an increasing aperture 18 of the first orifice 12 and drawing the first fluid flow with the separate second fluid flows F2 at a second velocity greater than the first velocity of the first fluid flow, wherein the separate first fluid flows F11 and F12 form corresponding separate first fluid filaments. According to this aspect of the invention, the flanking second fluid flows F2 create corresponding low pressure zones on substantially opposing sides of the first fluid flow which tend to separate the first fluid flow emanating from the increasing aperture 18 of the first orifice 12. This process is also applicable to forming separate first fluid flows from one or more of a plurality of first orifices of a body member wherein a corresponding one or more of the first orifices 12 has an increasing aperture 18 as discussed above.

Another mode of forming separate first fluid flows F11 and F12 from the first orifice 12 includes generating a high pressure zone 16 proximate an output of the first orifice 12 with converging fourth fluid flows and drawing the first fluid flows F11 and F12 with the separate second fluid flows F2 at a second velocity greater than the first velocity of the first fluid flow, wherein the separate first fluid flows F11 and F12 form corresponding separate first fluid filaments. According to this aspect of the invention, the fourth fluid flows may be convergently directed from opposing sides of the series formed by the first and second fluid flows, or the array, so that the converging fourth fluid flows meet to form the high pressure zone 16 as discussed

above. The first orifice 12 does not require an increasing aperture 18 for practicing this alternative aspect of the invention, which is also applicable to forming separate first fluid flows from each of a plurality of first orifices of a body member wherein a corresponding high pressure zone 16 is generated proximate an output of each of the plurality of first orifices.

According to another aspect of the invention, first fluid is dispensed from the plurality of first orifices to form the plurality of first fluid flows at substantially the same mass flow rate, and second fluid is dispensed from the plurality of second orifices to form the plurality of second fluid flows at substantially the same mass flow rate. According to a related aspect of the invention, the mass flow rates of one or more of the plurality of first fluid flows is controllable by varying either or both the size of the corresponding first orifice 12 and the fluid pressure across the corresponding first orifice 12, wherein the corresponding one or more first fluid flows have different mass flow rates. The mass flow rates of one or more of the plurality of second fluid flows is similarly controllable. And according to a related aspect of the invention, the meltblowing die or body member having a plurality of arrays or a plurality of first orifices and a plurality of second orifices arranged in an alternating series, as discussed above, also includes a first means for substantially uniformly distributing first fluid supplied to one or more of the plurality of first orifices 12 to form the plurality of first fluid flows F1 at the first velocity and at substantially the same mass flow rate, and a second means for substantially uniformly distributing second fluid supplied to one or more of the plurality of second orifices 14 to form the plurality of second fluid flows F2 at the second velocity and at substantially the same mass flow rate. According to this aspect of the invention, the dispensing of the plurality first fluid filaments formed by drawing and attenuating the plurality of first fluid flows from the plurality of first orifices of the die assembly may be controlled by controlling the distribution of first fluid to the plurality of first orifices 12.

In FIGS. 3, 4 and 5, the exemplary die assembly 100 comprises a

plurality of laminated members or plates. The plates of FIG. 3 are assembled one on top of the other beginning with the plate in FIG. 3a and ending with plate 3s. The plates of FIGS. 3f-3k correspond to the plates in FIGS. 4a-4f, respectively, and the plates of FIGS. 3f-3l corresponds to the assembly of FIG. 5, which shows an alternating series of the plurality of first and second orifices 110 and 120 as discussed above. The first and second fluids supplied to the die assembly 100 are distributed to the plurality of first and second orifices 110 and 120 as follows. The first fluid is supplied from a first restrictor cavity inlet 132 in the plate of FIG. 3f, also shown in FIG. 4a, to a first restrictor cavity 130 in the plate of FIG. 3g, also shown in FIG. 4b, through a plurality of passages 134 in the plate of FIG. 3h, also shown in FIG. 4c, and into first accumulator cavity 140 in the plate of FIG. 3i, also shown in FIG. 4d, where the first fluid is accumulated. The first fluid is then supplied from the accumulator cavity 140 through a plurality of passages 136 in the plate of FIG. 3j, also shown in FIG. 4e, to a plurality of first slots 109 in the plate of FIG. 3k, also shown in FIG. 4f. The plurality of first slots 109 form the plurality of first orifices 110 shown in FIG. 5 when the plate of FIG. 3k is disposed between the plate of FIG. 3j and the plate of FIG. 3l. The second fluid is supplied from a second restrictor cavity inlet 152 in the plates of FIGS. 3f-3o to a second restrictor cavity 150 in the plate of FIG. 3o, through a plurality of passages 135 in the plate of FIG. 3n, and into a second accumulator cavity 160 in the plate of FIG. 3m where the second fluid is accumulated. The second fluid accumulated in the accumulator cavity 160 is then supplied through a plurality of passages 137 in the plate of FIG. 3l to a plurality of second slots 119 in the plate of FIG. 3k.

According to another aspect of the invention, the first fluid mass flow rate through each of the passages 134 is controlled by varying a size of the passages 134. In the exemplary embodiment of FIG. 3, the first fluid supplied from the first restrictor cavity 130 is substantially uniformly distributed and supplied to the first accumulator cavity 140 by the plurality passages 134 having varying sizes to compensate

for decreasing pressure along portions of the first restrictor cavity outlet and to provide substantially the same first fluid mass flow rate through each of the passages 134. The substantially uniformly distributed first fluid is accumulated in the first accumulator cavity 140 and supplied through a plurality of passages 136 at the first accumulator cavity outlet to the plurality of first orifices 110. And the plurality of first orifices 110, which are substantially the same size, dispense the uniformly distributed first fluid to form the plurality of first fluid flows at the first velocity and at substantially the same mass flow rate. Similarly, the second fluid supplied from the second restrictor cavity 150 is substantially uniformly distributed and supplied to the second accumulator cavity 160 by the plurality of passages 135 having varying sizes to compensate for decreasing pressure along portions of the second restrictor cavity outlet and to provide substantially the same second fluid mass flow rate through each of the passages 135. The substantially uniformly distributed second fluid is accumulated in the second accumulator cavity 160 and supplied through a plurality of passages 137 at the second accumulator cavity outlet to the plurality of second orifices 120. And the plurality of second orifices 120, which are substantially the same size, dispense the uniformly distributed second fluid to form the plurality of second fluid flows at the second velocity and at substantially the same mass flow rate.

In alternative embodiments, however, the fluid mass flow rates through any one or more of the orifices 110 and 120 may be selectively varied by varying a size of the corresponding orifices. And in an alternative or cumulative configuration, the fluid mass flow rate through any one or more of the first and second orifices 110 and 120 may be selectively varied by varying a pressure across the corresponding orifices. The pressure across an orifice may be decreased, for example, by forming an additional cavity, which causes a fluid pressure drop, along the fluid flow path to the selected orifice. If the die assembly is fabricated from a plurality of individual plates as discussed above, the additional cavity or cavities may be formed readily in one of the existing plates or in an additional plate.

FIG. 5 shows the plurality of second slots 119, which form the plurality of second orifices 120, disposed in a recess with a tapered aperture 121 relative to the plurality of first slots 109, which form the plurality of first orifices 110. As discussed above, this configuration reduces the tendency of the first fluid flows to migrate from the plurality of first orifices 110 back upward and into the plurality of second orifices 120 and also modifies the plurality of second fluid flows. To obtain this configuration, the plates of FIGS. 3j-3l have corresponding tapered slots 121 to provide the tapered aperture when the plates of FIGS. 3j-3l are assembled. In alternative embodiments, however, the plates of FIGS. 3j-3l may have slot configurations to provide any combination of the first and second orifice configurations discussed above with respect to FIG. 2a.

According to another aspect of the invention, the die assembly 100 includes a third means for generating a high pressure zone proximate an output of each of the plurality of first orifices 110 with converging third fluid flows, wherein the high pressure zone blocks residual fluid flow from the corresponding first orifice after terminating a supply of first fluid to the first orifice as discussed above. And according to a related aspect of the invention, the plurality of second fluid flows are diverted to form the high pressure zones as discussed below.

In the exemplary embodiments of FIGS. 3 and 6, the die assembly 100 comprises a plurality of laminated members or plates, wherein the plates of FIGS. 3b-3f correspond to plates 502-506 in the partial die assembly of FIG. 6, respectively. According to this exemplary configuration, the third fluid is supplied from a third fluid inlet 172 extending through the plates of FIGS. 3b-3e into a first distribution cavity 170 in the plate of FIG. 3e, through a plurality of orifices 173 in the plate of FIG. 3d, into a cavity 174 in the plate of FIG. 3c, and into a cavity 176 in the plate of FIG. 3b. The fourth fluid is then supplied from the cavity 176 through a first plurality of orifices 178 in the plate of FIG. 3c, which orifices 178 form a first component of the converging third fluid flows. The third fluid also is supplied from the third fluid inlet 172 which

continues to extend through the plates of FIGS. 3e-3q into a second distribution cavity 180 in the plate of FIG. 3q, into a plurality of orifices 183 in the plate of FIG. 3r, into a cavity 184 in the plate of FIG. 3s, and into a cavity 186 in the plate of FIG. 3t. The fourth fluid is then supplied from the cavity 186 through a second plurality of orifices 188 in the plate of FIG. 3s, which orifices 188 form a second component of the converging third fluid flows. The plurality of orifices 173 and 183 have various sizes, which compensate for pressure variations in the cavities 170 and 180 and uniformly distribute and supply the third fluid flow to the cavities 174 and 184, respectively. According to this configuration, the converging third fluid flows are dispensed from the respective orifices 178 and 188 at substantially the same mass flow rate. The third fluid mass flow rate through any one or more of the orifices 178 and 188, however, may be selectively varied as discussed above.

According to the exemplary embodiment, the first component of the converging third fluid flows emanates from the first plurality of orifices 178 and the second component of converging third fluid flows emanates from the second plurality of orifices 188 converge to form a high pressure zone proximate an output of each of the plurality of first orifices 110. The converging third fluid flows in this exemplary embodiment do not have a flow component in the flow direction of the first fluid flows, wherein the plurality of high pressure zones are useable to stem or block the flow of residual fluid from the plurality of first fluid orifices after terminating a first fluid supply to the first fluid inlet 132. In another application, the converging third fluid flows are useable to form separate first fluid flows as discussed above.

The exemplary embodiments of the die assembly 100 may be formed of a plurality of plates of substantially the same thickness, or alternatively, may be formed of a plurality of plates having different plate thicknesses, wherein each plate thickness is determined by the size of the conduits or cavities defined thereby as shown in FIGS. 3-5. The plates may be formed from metals, plastics, and ceramics among other materials, and the plates may be fabricated by stamping, punching, chemical etching,



5 machining, and laser cutting among other processes, which are relatively cost effective alternatives to the prior art. Further, a die assembly 100 comprising a plurality of plates, as shown in the exemplary embodiments, provides considerable design flexibility in the configuration of the arrays or orifices, and the fluid flow and the distribution paths, which design and fabrication are not limited by the constraints imposed by prior art drilling processes. The plates of the present die assembly, for example, may be readily fabricated to produce die assemblies having configurations based on one or more of the exemplary configurations of FIG. 2b.

10 According to another aspect of the invention, the first and second fluids are supplied to the corresponding first and second fluid inlets 132 and 152 on a common fluid interface of the die assembly 100. FIG. 7 is an exemplary die adapter assembly 200 for mounting the die assembly 100 and for supplying fluids thereto. The die adapter assembly 200 includes a die assembly mounting interface 210 having a first fluid outlet port 212, a second fluid outlet port 214, and a control or third fluid outlet port 216, which are each coupled by corresponding conduits to corresponding fluid inlets ports 213, 215, and 217 on a body portion 220 of the adapter 200. In another embodiment, the die adapter assembly 200 includes a second interface 230 with a first fluid outlet port 232, a second fluid outlet port 234, and a control or third fluid outlet port 236, which are also coupled by corresponding conduit extensions, not shown, to corresponding fluid inlets ports 213, 215, and 217 on the body portion 220 of the adapter 200. The second mounting interface 230 is oriented at an angle relative to the first mounting interface 210, which in the exemplary embodiment is a 90 degree angle.

20 The die assembly 100 is coupled to the adapter 200 by mounting the die assembly 100 on the mounting interface 210 or 230. A sealing member like an o-ring, not shown, is disposed in a seat about each of the fluid outlets of the mounting interface 210 and 230 to provide a seal between the die assembly 100 and the adapter 200. The die assembly 100 and mounting interfaces 210 and 230 may also include mating alignment tabs to facilitate alignment and mounting of the die assembly 100 on

the adapter 200. In one configuration, the die assembly 100 is mounted between the adapter interface 210 and a corresponding retaining plate 240, which retains the die assembly 100 mounted on the interface. A threaded bolt, not shown, is disposed through a central bore 232 of the retaining plate 230, and through a central bore of the die assembly 100, and into a threaded bore 222 of the body portion 220 of the adapter assembly 200, which permits ready installation and removal of the die assembly 100 relative to the adapter assembly 200. A similar retaining plate, not shown, is mounted on the unused mounting interface to seal the fluid outlet ports thereon. In another configuration, not shown, a second die assembly 100 is mounted on the second mounting interface so that the adapter 200 supplies fluids simultaneously to two die assemblies.

FIG. 3a is a die assembly fluid switching interface plate for diverting a single fluid flow to form either the second fluid flow or the third fluid flow as discussed above. The fluid flow switching plate includes a first fluid inlet 132, a switched fluid inlet 190, a primary fluid flow path 192 which couples the fluid inlet 190 with the third fluid inlet 172, and a secondary fluid flow path 194 which couples the fluid inlet 190 with the second fluid inlet 152. The primary fluid flow path 192 is a path of least resistance resulting from an asymmetry between the primary path 192 and the secondary path 194 so that fluid supplied to the fluid inlet 190 has a tendency to follow the curved primary fluid flow path 192 toward the third fluid inlet 172. The fluid from the fluid inlet 190 is diverted from the primary path 192 to the secondary path 194 by introducing an obstruction along the primary path 192, which causes the fluid to flow along the secondary path 194 toward the second fluid inlet 152. In the exemplary embodiment, the obstruction is a control air flow introduced from a control fluid inlet 193, which urges the switched fluid toward the secondary fluid flow path 194. The plate of FIG. 3a also includes a slot 195 with opposing end portions coupled by corresponding ports 196 and 197 in the plate of FIG. 3b to a recess 198 formed in the adjacent plates of FIGS. 3c and 3d for fluid pressure balancing. According to this

configuration, the first fluid outlet 212, the second fluid outlet 214, and the control fluid outlet 216 of the die assembly adapter 200 are coupled, respectively, to the first fluid inlet 132, the switched fluid inlet 190, and the control fluid inlet 193 of the switching plate of FIG. 3a to supply fluid to the die assembly 100.

5 In one application, the die assembly adapter 200 is coupled to an MR-1300 nozzle module available from ITW Dynatec, Hendersonville, Tennessee, which includes a pneumatically actuatable valve for controlling the supply of first fluid to the first fluid inlet 213 of the die assembly adapter 200. The control air inlet 215 of the adapter 200 is coupled to the MR-1300 valve actuation air supply to supply control air to the control fluid inlet 193 of the die assembly 100, which directs fluid from the switched fluid inlet 190 to the fluid inlet 152 of the die assembly when the MR-1300 valve is opened to supply first fluid to the first fluid inlet 132 of the die assembly 100. According to this configuration, the first fluid and the second fluid supplied to the die assembly 100 are dispensed from the first and second orifices 110 and 120 as discussed above. And when the MR-1300 valve is closed to terminate the first fluid supply, control air to the control fluid inlet 193 of the die assembly 100 is terminated, wherein fluid from the switched fluid inlet 190 is directed to the fluid inlet 172 to form the converging air flows, which block first fluid from the first orifices as discussed above.

FIG. 3z is a die assembly fluid interface plate useable as an alternative to the die assembly fluid switching interface plate in FIG 3a, wherein the fluid inlet 190 of the die assembly 100 is coupled directly to the second fluid inlet 152, and the fluid inlet 193 of the die assembly 100 is coupled directly to the third fluid inlet 172. According to this configuration, the control air inlet 215 of the adapter 200 is coupled to the MR-1300 valve actuation air supply to supply a control air to the fluid inlet 193 of the die assembly 100 when the MR-1300 valve is closed to terminate first fluid to the first fluid inlet 132 of the die assembly 100. This dedicated configuration provides more responsive residual first fluid flow blocking since there is no switching delay required to form the converging third fluid flows. The converging third fluid flows of

the die assembly thus form high pressure zones in the presence of, but are unaffected by, the second fluid flows, which draw and attenuate the first fluid flows. In yet another configuration, the fluid supplied to the fluid inlet 193 is unrelated to the MR-1300 valve actuation air supply to provide still more control over the respective fluid flows.

According to another exemplary application, the meltblowing method and apparatus disclosed herein dispense meltblown adhesives onto substrates in manufacturing processes including the production of bodily fluid absorbing hygienic articles. According to a configuration for these applications, which is shown in FIG. 7, a plurality of at least two adjacent die assemblies 100 are disposed in corresponding die assembly adapters 200 arranged side by side to form a linear array of the plurality of corresponding adjacent first and second orifices 110 and 120 of each of the adjacent die assemblies 100. For meltblown adhesive dispensing applications, the first and second orifices of the die assembly have dimensions between approximately 0.001 and 0.030 inches on each side. These dimensions are not limiting however, and may be more or less for these and other applications. In one configuration, at least one of the endmost first orifices of the plurality of adjacent die assemblies has a modified first fluid flow vacillation to control the edge profile or edge definition of meltblown adhesive dispensed from the array of die assemblies according to the aspects and embodiments of the invention discussed above. In another configuration, the plurality of first orifices of the plurality of adjacent die assemblies are oriented to produce a slightly diverging pluralities of first fluid flows, which provide a uniform meltblown adhesive application onto the substrates. And in another configuration, at least one or more of the plurality of first fluid flows are at different mass flow rates according to one or more configurations discussed above. The plates of the die assembly 100 may be assembled by soldering, brazing, mechanical clamping, fusion under high temperature and pressure, and adhesive bonding among other means.

While the foregoing written description of the invention enables anyone

skilled in the art to make and use what is at present considered to be the best mode of the invention, it will be appreciated and understood by anyone skilled in the art the existence of variations, combinations, modifications and equivalents within the spirit and scope of the specific exemplary embodiments disclosed herein. The present invention therefore is to be limited not by the specific exemplary embodiments disclosed herein but by all embodiments within the scope of the appended claims.

5

CLAIMS

What is claimed is:

1. A meltblowing method comprising steps of:  
dispensing a first fluid to form a first fluid flow at a first velocity;  
dispensing a second fluid to form separate second fluid flows at a second  
velocity along substantially opposing flanking sides of the first fluid flow;  
drawing the first fluid flow with the separate second fluid flows at a  
second velocity greater than the first velocity of the first fluid flow; and  
non-convergently directing the first fluid flow and the separate second  
fluid flows along flanking sides of the first fluid flow,  
wherein drawing the first fluid flow attenuates the first fluid flow to form  
a first fluid filament.

2. The method of Claim 1 further comprising steps of controlling a  
vacillation of the first fluid flow by varying one of a spacing between the first fluid flow  
and at least one of the separate second fluid flows, by varying an amount of at least  
one of the separate second fluid flows, and by varying a velocity of at least one of the  
separate second fluid flows.

3. The method of Claim 1 further comprising steps of:  
dispensing the first fluid from a first orifice of a body member to form  
the first fluid flow;  
terminating a supply of first fluid dispensed from the first orifice;  
generating a high pressure zone proximate an output of the first orifice

with converging separate third fluid flows; and

blocking residual first fluid flow from the first orifice with the high pressure zone generated proximate the output of the first orifice after terminating the supply of first fluid.

4. The method of Claim 3 further comprising steps of redirecting the separate second fluid flows to form the converging third fluid flows.

5. The method of Claim 1 further comprising steps of:

dispensing the first fluid from a first orifice of a body member to form the first fluid flow;

forming separate first fluid flows from the first orifice by dispensing the first fluid through an increasingly large diameter of the first orifice and drawing the first fluid flow with the separate second fluid flows at a second velocity greater than the first velocity of the first fluid flow,

wherein the separate first fluid flows are attenuated to form corresponding separate first fluid filaments.

6. The method of Claim 1 further comprising steps of:

dispensing the first fluid from a first orifice of a body member to form the first fluid flow;

forming separate first fluid flows from the first orifice by generating a high pressure zone proximate an output of the first orifice with converging fourth fluid flows and drawing the first fluid flow with the separate second fluid flows at a second velocity greater than the first velocity of the first fluid flow,

wherein the separate first fluid flows are attenuated to form corresponding separate first fluid filaments.

7. The method of Claim 1 further comprising steps of directing in parallel the first fluid flow and the separate second fluid flows along flanking sides of the first fluid flow.

8. The method of Claim 1 further comprising steps of divergently directing the first fluid flow and the separate second fluid flows.

9. The method of Claim 1 further comprising steps of:  
dispensing the first fluid to form a plurality of first fluid flows at the first velocity;

dispensing the second fluid to form a plurality of second fluid flows at the second velocity, the plurality of first fluid flows and the plurality of second fluid flows arranged in an alternating series so that each of the plurality of first fluid flows is flanked on substantially opposing sides by one of the plurality of second fluid flows;

drawing the plurality of first fluid flows with the plurality of second fluid flows at a second velocity greater than the first velocity of the plurality of first fluid flows; and

directing non-convergently the plurality of first fluid flows and the plurality of second fluid flows,

wherein plurality of first fluid flows are attenuated to form a plurality of first fluid filaments.



10. The method of Claim 9 further comprising steps of:  
dispensing the first fluid from a plurality of first orifices of a body  
member to form the plurality of first fluid flows;  
terminating a supply of first fluid dispensed from the plurality of first  
5 orifices;

generating a high pressure zone proximate an output of each of the  
plurality of first orifices with converging third fluid flows; and

blocking residual first fluid flows from the plurality of first orifices with  
the high pressure zone generated proximate the output of each of the plurality of first  
10 orifices after terminating the supply of first fluid.

11. The method of Claim 9 further comprising steps of:  
dispensing the first fluid from a plurality of first orifices of a body  
member to form the plurality of first fluid flows;

forming separate first fluid flows from each of the plurality of first  
5 orifices by dispensing the first fluid through an increasingly large diameter of each of  
the plurality of first orifices and drawing the plurality of first fluid flows with the  
plurality of second fluid flows at a second velocity greater than the first velocity of the  
plurality first fluid flows,

wherein the separate first fluid flows are attenuated to form  
10 corresponding separate first fluid filaments.

12. The method of Claim 9 further comprising steps of:  
dispensing the first fluid from a plurality of first orifices of a body  
member to form the plurality of first fluid flows;

forming separate first fluid flows from each of the plurality of first

5 orifices by generating a high pressure zone proximate an output of each of the plurality  
of first orifices with converging fourth fluid flows and drawing the plurality of first fluid  
flows with the plurality of second fluid flows at a second velocity greater than the first  
velocity of the plurality of the first fluid flows,

10 wherein the separate first fluid flows are attenuated to form  
corresponding separate first fluid filaments.

13. The method of Claim 9 further comprising steps of dispensing the  
first fluid to form the plurality of first fluid flows at the first velocity and at  
substantially the same mass flow rate.

5 14. The method of Claim 9 further comprising steps of controlling a  
vacillation of at least one of the plurality of first fluid flows by varying one of a spacing  
between at least one of the plurality of first fluid flows and at least one of the flanking  
plurality of second fluid flows, by varying an amount of at least one of the plurality of  
second fluid flows, and by varying a velocity of at least one of the plurality of second  
fluid flows.

15. The method of Claim 9 further comprising steps of controlling an  
amount of at least one of the plurality of first fluid flows by varying one of a  
corresponding first orifice size and a first fluid pressure across a corresponding first  
orifice.

16. The method of Claim 9 further comprising steps of:

substantially uniformly distributing the first fluid in a first restrictor cavity, the substantially uniformly distributed first fluid supplied from a first restrictor cavity inlet;

5 supplying the substantially uniformly distributed first fluid distributed in the first restrictor cavity from a first restrictor cavity outlet;

accumulating the substantially uniformly distributed first fluid supplied from the first restrictor cavity outlet in a first accumulator cavity;

10 supplying the substantially uniformly distributed first fluid accumulated in the first accumulator cavity from a first accumulator cavity outlet; and

dispensing the substantially uniformly distributed first fluid supplied from the first accumulator cavity outlet from a plurality of first orifices to form the plurality of first fluid flows at the first velocity and substantially the same mass flow rate.

17. The method of Claim 16 further comprising steps of:

substantially uniformly distributing the second fluid in a second restrictor cavity, the substantially uniformly distributed second fluid supplied from a second restrictor cavity inlet;

5 supplying the substantially uniformly distributed second fluid in the second restrictor cavity from a second restrictor cavity outlet;

accumulating the substantially uniformly distributed second fluid supplied from the second restrictor cavity outlet in a second accumulator cavity;

10 supplying the substantially uniformly distributed second fluid accumulated in the second accumulator cavity from a second accumulator cavity outlet; and

dispensing the substantially uniformly distributed second fluid supplied from the second accumulator cavity outlet from a plurality of second orifices to form the plurality of second fluid flows at the second velocity.

18. A meltblowing apparatus comprising:

a plurality of first orifices in a body member for dispensing a first fluid  
and forming a plurality of first fluid flows;

5 a plurality of second orifices in the body member for dispensing a second  
fluid and forming a plurality of second fluid flows;

the plurality of first orifices and the plurality of second orifices arranged  
in an alternating series so that each of the plurality of first orifices is flanked on  
substantially opposing sides by one of the plurality of second orifices;

10 the plurality of first orifices and the plurality of second orifices oriented  
to non-convergently direct the plurality of first fluid flows and the plurality of second  
fluid flows, and

15 the plurality of first orifices and the plurality of second orifices spaced  
so that the plurality of first fluid flows at a first velocity are drawable from the plurality  
of first orifices by the plurality of second fluid flows at a second velocity greater than  
the first velocity,

wherein drawing the plurality of first fluid flows attenuates the plurality  
of first fluid flows to form a plurality of first fluid filaments.

19. The apparatus of Claim 18 further comprising:

a plurality of third orifices in the body member for dispensing a third  
fluid and forming a plurality of third fluid flow,

5 the plurality of third orifices arranged to converge the third fluid flows  
and generate a high pressure zone proximate an output proximate each of the plurality  
of first orifices,

wherein the high pressure zone blocks residual fluid flow from the  
corresponding first orifice after terminating a supply of first fluid.

20. The apparatus of Claim 18 wherein the plurality of first orifices and the plurality of second orifices are oriented to direct the plurality of first fluid flows and the plurality of second fluid flows in parallel.

21. The apparatus of Claim 18 wherein the plurality of first orifices and the plurality of second orifices oriented to divergently direct the plurality of first fluid flows and the plurality of second fluid flows.

22. The apparatus of Claim 18 further comprising:

a first means for substantially uniformly distributing first fluid supplied to the plurality of first orifices to form the plurality of first fluid flows at the first velocity and at substantially the same mass flow rate; and

a second means for substantially uniformly distributing second fluid supplied to the plurality of second orifices to form the plurality of second fluid flows at the second velocity.

23. The apparatus of Claim 22 further comprising a third means for generating a high pressure zone proximate an output of each of the plurality of first orifices with converging third fluid flows, wherein the high pressure zone blocks residual fluid flow from the corresponding first orifice after terminating a supply of first fluid.

24. The apparatus of Claim 22 further comprising fourth means for

forming separate first fluid flows from each of the plurality of first orifices.

25. The apparatus of Claim 24, the fourth means comprising an increasing aperture coupled to each of the plurality of first orifices, wherein the separate first fluid flows are formable from each of the plurality of first orifices by drawing the plurality of first fluid flows with the plurality of second fluid flows at a second velocity greater than the first velocity of the plurality first fluid flows.

26. The apparatus of Claim 24, the fourth means comprising a high pressure zone generated proximate an output of each of the plurality of first orifices with converging fourth fluid flows, wherein the separate first fluid flows are formable from each of the plurality of first orifices by drawing the plurality of first fluid flows with the plurality of second fluid flows at a second velocity greater than the first velocity of the plurality first fluid flows.

27. The apparatus of Claim 18 further comprising:

a first restrictor cavity in the body member, the first restrictor cavity having a first restrictor cavity inlet and a first restrictor cavity outlet;

a first accumulator cavity in the body member, the first accumulator cavity having a first accumulator cavity inlet coupled to the first restrictor cavity outlet, and the first accumulator cavity having a first accumulator cavity outlet coupled to the plurality of first orifices,

wherein first fluid supplied to the first restrictor cavity inlet is substantially uniformly distributed to the plurality of first orifices to form the plurality of first fluid flows at the first velocity and at substantially the same mass flow rate.

28. The apparatus of Claim 27 further comprising:

a second restrictor cavity in the body member, the second restrictor cavity having a second restrictor cavity inlet and a second restrictor cavity outlet;

a second accumulator cavity in the body member, the second accumulator cavity having a second accumulator cavity inlet coupled to the second restrictor cavity outlet, and the second accumulator cavity having a second accumulator cavity outlet coupled to the plurality of second orifices,

wherein second fluid supplied to the second restrictor cavity inlet is substantially uniformly distributed to the plurality of second orifices to form the plurality of second fluid flows.

29. The apparatus of Claim 18, each of the plurality of second orifices disposed in a corresponding aperture of the body member to recess the plurality of second orifices in the body member relative to the plurality of first orifices.

30. The apparatus of Claim 18, each of the plurality of second orifices disposed in a corresponding increasing aperture of the body member to recess the plurality of second orifices in the body member relative to the plurality of first orifices.

31. The apparatus of Claim 18, further comprising a plurality of at least two body members arranged adjacently, wherein the alternating series of first orifices and second orifices of each body member is aligned in series with the alternating series of first orifices and second orifices of an adjacent body member.

32. The apparatus of Claim 18, wherein the body member is a die assembly comprising a plurality of laminated members.

33. The apparatus of Claim 32, the plurality of laminated members of the die assembly comprising:

a first plate having a first restrictor cavity in the body member, the first restrictor cavity having a first restrictor cavity inlet and a first restrictor cavity outlet;

a second plate having first accumulator cavity in the body member, the first accumulator cavity having a first accumulator cavity inlet coupled to the first restrictor cavity outlet, and the first accumulator cavity having a first accumulator cavity outlet coupled to the plurality of first orifices; and

a third plate having the plurality of first orifices and the plurality of second orifices,

wherein first fluid supplied to the first restrictor cavity inlet is substantially uniformly distributed to the plurality of first orifices to form the plurality of first fluid flows at the first velocity and at substantially the same mass flow rate.

34. The apparatus of Claim 33 further comprising:

a fourth plate having a second restrictor cavity in the body member, the second restrictor cavity having a second restrictor cavity inlet and a second restrictor cavity outlet;

a fifth plate having a second accumulator cavity in the body member, the second accumulator cavity having a second accumulator cavity inlet coupled to the second restrictor cavity outlet, and the second accumulator cavity having a second accumulator cavity outlet coupled to the plurality of second orifices,

wherein second fluid supplied to the second restrictor cavity inlet is



10 substantially uniformly distributed to the plurality of second orifices to form the  
plurality of second fluid flows.

35. The apparatus of Claim 33, further comprising  
a sixth plate between the first plate and the second plate, the sixth plate  
having a plurality of passages coupling the first restrictor cavity and the first  
accumulator cavity; and

5 a seventh plate between the second plate and the third plate, the seventh  
plate having a plurality of passages coupling the first accumulator and the plurality of  
first orifices,

10 wherein the plurality of passages in the sixth plate and the plurality of  
passages in the seventh plate are dimensioned to substantially uniformly distribute the  
first fluid supplied from the first restrictor cavity to the plurality of first orifices.

36. The apparatus of Claim 34, further comprising:

a eighth plate between the fourth plate and the fifth plate, the eighth  
plate having a plurality of passages coupling the second restrictor cavity and the second  
accumulator cavity; and

5 a ninth plate between the second plate and the third plate, the ninth  
plate having a plurality of passages coupling the second accumulator cavity and the  
plurality of second orifices,

10 wherein the plurality of passages in the eighth plate and the plurality of  
passages in the ninth plate are dimensioned to substantially uniformly distribute second  
fluid supplied from the second restrictor cavity to the plurality of second orifices.

37. The apparatus of Claim 34, the third plate comprising:

a tenth plate having the plurality of first openings and the plurality of second openings;

an eleventh plate with a plurality of first ports coupling the first accumulator cavity to the plurality of first openings in the tenth plate; and

a twelfth plate with a plurality of second ports coupling the second accumulator cavity to the plurality of second openings in the tenth plate,

wherein the tenth plate is disposed between the eleventh plate and the twelfth plate to form the plurality of first orifices and the plurality of second orifices.

38. The apparatus of Claim 34 further comprising:

a thirteenth plate having a third restrictor cavity coupled to a third fluid inlet;

a fourteenth plate having a third accumulator cavity and a plurality of converging fluid orifices;

a fifteenth plate between the thirteenth plate and the fourteenth plate, the fifteenth plate having a plurality of fluid passages coupling the third restrictor cavity and the third accumulator cavity;

a sixteenth plate having a cavity coupling the third accumulator cavity and the plurality of converging fluid orifices fourteenth plate;

a seventeenth plate having a fourth restrictor cavity coupled to a fourth fluid inlet;

an eighteenth plate having a fourth accumulator cavity and a plurality of converging fluid orifices;

a nineteenth plate between the seventeenth plate and the eighteenth plate, the nineteenth plate having a plurality of fluid passages coupling the fourth restrictor cavity and the fourth accumulator cavity; and

a twentieth plate having a cavity coupling the fourth accumulator cavity and the plurality of converging fluid orifices of the eighteenth plate,

20 wherein third fluid supplied to the third fluid inlet and to the fourth fluid inlet is directed to converge and form a high pressure zone proximate the plurality of first orifices.

39. The apparatus of Claim 38 further comprising a fluid interface plate having a first fluid inlet, a second fluid inlet and a third fluid inlet, the first fluid inlet of the fluid interface plate coupled to the first restrictor cavity of the first plate, the  
5 second fluid inlet of the fluid interface plate coupled to the second restrictor cavity of the fourth plate, and the third fluid inlet of the fluid interface plate coupled to the third fluid inlet of the thirteenth plate and to the fourth fluid inlet of the seventeenth plate.

40. The apparatus of Claim 39, the fluid interface plate is a fluid switching interface plate comprising a common fluid inlet coupling the second fluid inlet and the third fluid inlet, and a control fluid inlet for switching fluid supplied to the common fluid inlet between the second fluid inlet and the third fluid inlet.

41. The apparatus of Claim 39 further comprising a die adapter assembly having a first die assembly interface for mounting a die assembly, the first die assembly interface having a first fluid supply outlet for supplying first fluid to the first fluid inlet of the fluid interface plate, the first die assembly interface having a second  
5 fluid supply outlet for supplying second fluid to the second fluid inlet of the fluid interface plate, and the first die assembly interface having a third fluid supply outlet

for supplying third fluid to the third fluid inlet of the fluid interface plate.

42. The apparatus of Claim 41 comprising a plurality of at least two die adapter assemblies arranged adjacently to form a plurality of corresponding adjacently arranged die assemblies.

43. The apparatus of Claim 18 further comprising a die adapter assembly having a first die assembly interface for mounting a die assembly, the first die assembly interface having a first fluid supply outlet for supplying first fluid to the die assembly, and the first die assembly interface having a second fluid supply outlet for supplying second fluid to the die assembly.

44. The apparatus of Claim 43, the die adapter assembly having a second die assembly interface for mounting a die assembly, the second die assembly interface having a first fluid supply outlet for supplying first fluid to the die assembly, and the second die assembly interface having a second fluid supply outlet for supplying second fluid to the die assembly.

45. The apparatus of Claim 18, further comprising a plurality of at least two orifice arrays, each orifice array formed of a first orifice and two second orifice disposed on substantially opposing side of the first orifice, wherein the plurality of orifice arrays are arranged in a parallel orientation.

46. The apparatus of Claim 18, further comprising a plurality of at least two orifice arrays, each orifice array formed of a first orifice and two second orifice disposed on substantially opposing side of the first orifice, wherein the plurality of orifice arrays are arranged in a non-parallel orientation.

47. The apparatus of Claim 18, further comprising a plurality of at least two orifice arrays, each orifice array formed of a first orifice and two second orifice disposed on substantially opposing side of the first orifice, wherein the plurality of orifice arrays are arranged on separate faces of the body member to provide a first fluid flow in three dimensions.

ABSTRACT

A meltblowing method and apparatus for dispensing an adhesive through a plurality of first orifices of a die assembly fabricated from a plurality of laminated members to form a plurality of adhesive flows at a first velocity, and dispensing air through a plurality of second orifices in the die assembly to form a plurality of air flows at a second velocity. The plurality of first and second orifices arranged in an alternating series so that each of the plurality of first orifices is flanked on substantially opposing sides by one of the plurality of second orifices, wherein the plurality of first and second orifices are oriented to direct non-convergently the plurality of adhesive flows and the plurality of air flows. The plurality of adhesive flows are drawn and attenuated by the plurality of air flows at the second velocity greater than the first velocity of the plurality of adhesive flows, wherein the plurality of adhesive flows are attenuated to form a plurality of adhesive filaments useable for the production of bodily fluid absorbing hygienic articles.

FIG. 1

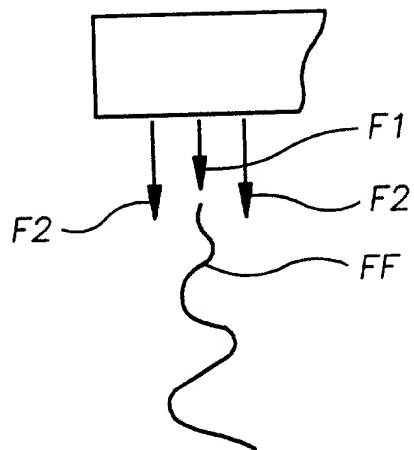


FIG. 2a

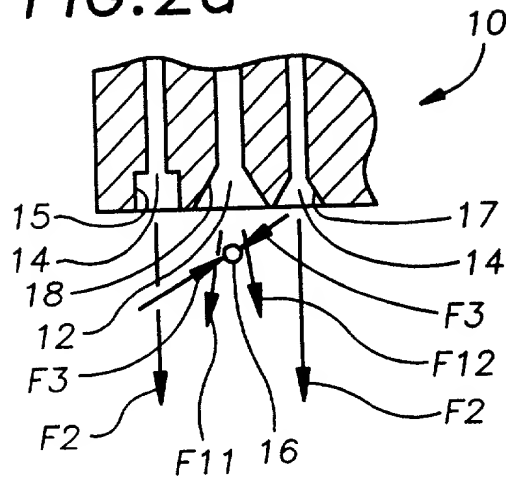


FIG. 2b

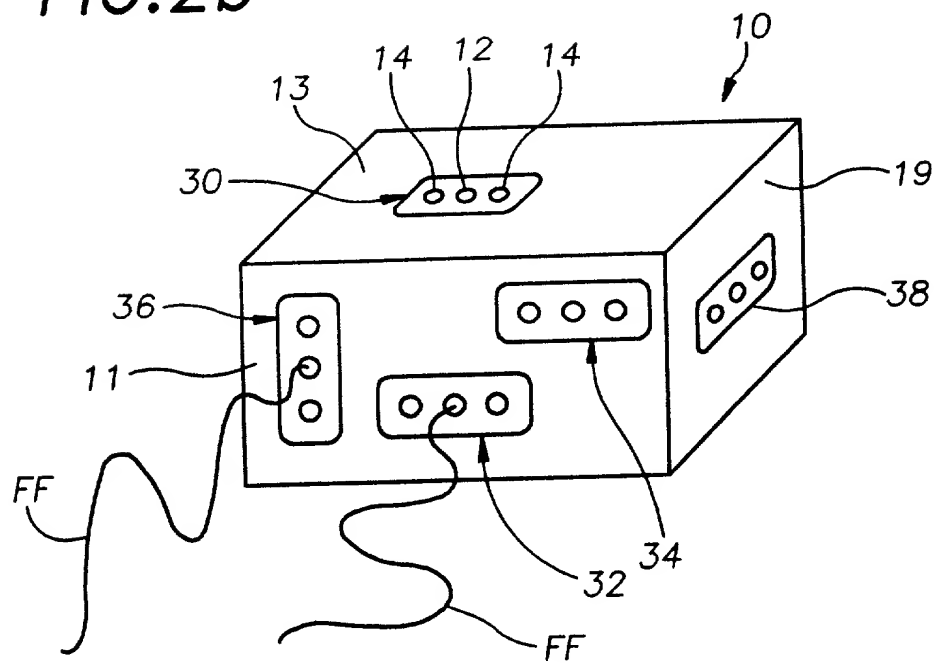


FIG.3a

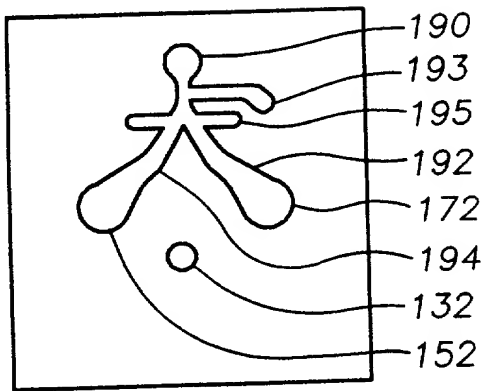


FIG.3b

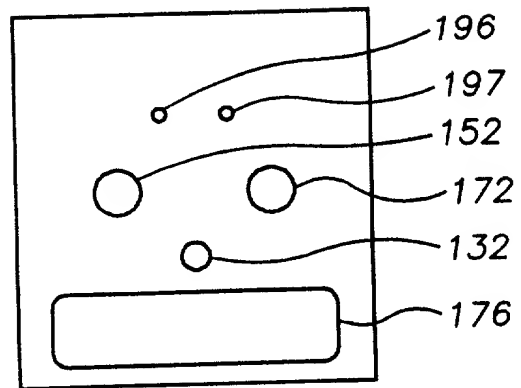


FIG.3d

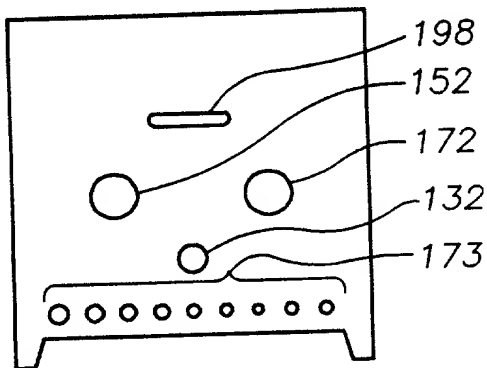


FIG.3c

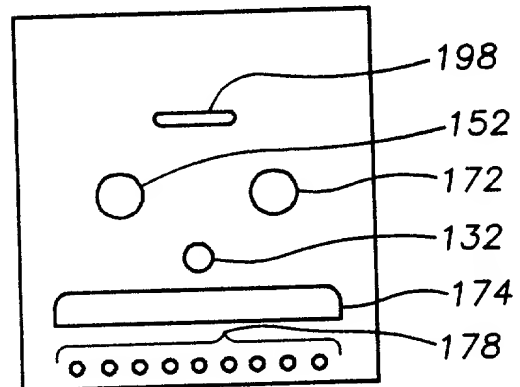


FIG.3e

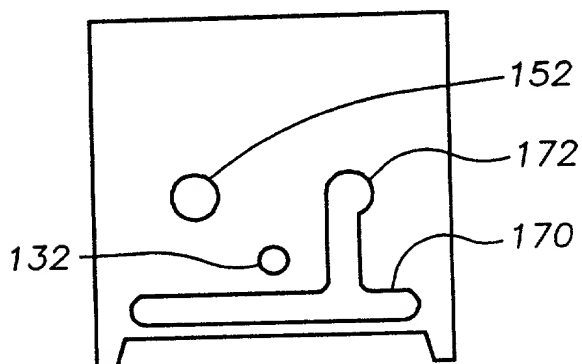


FIG.3f

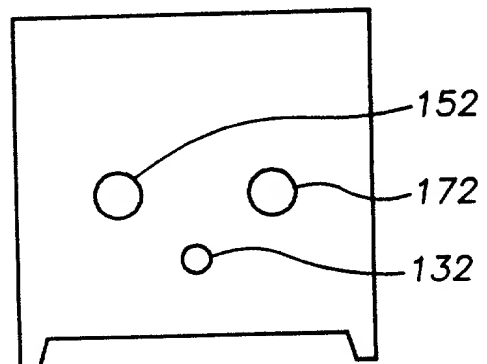




FIG. 3h

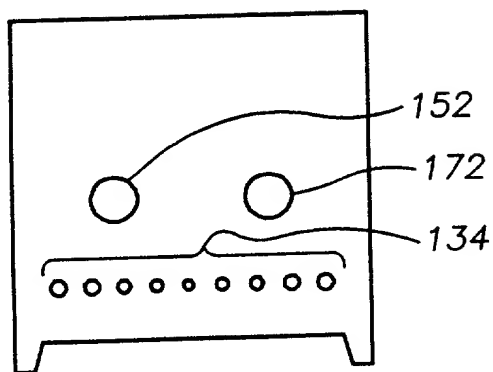


FIG. 3g

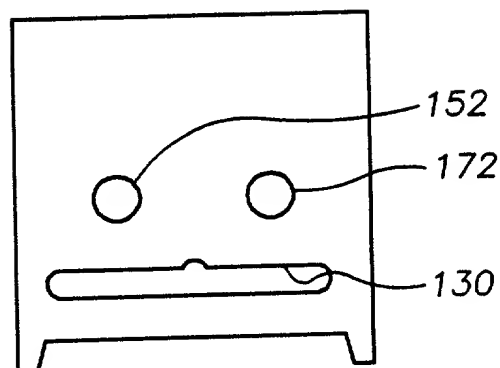


FIG. 3i

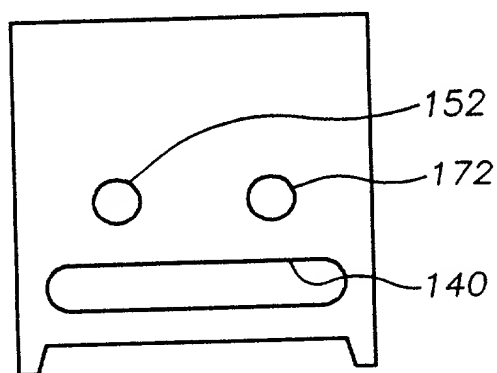


FIG. 3j

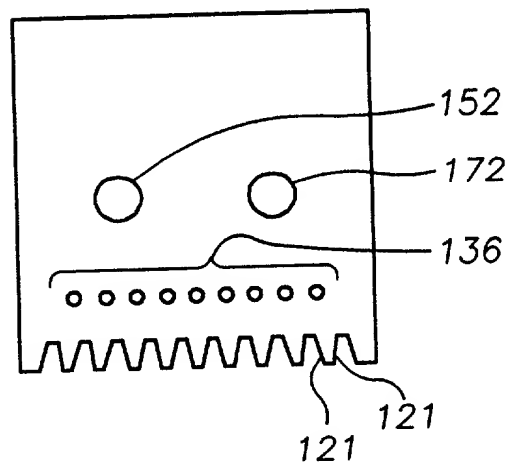


FIG. 3l

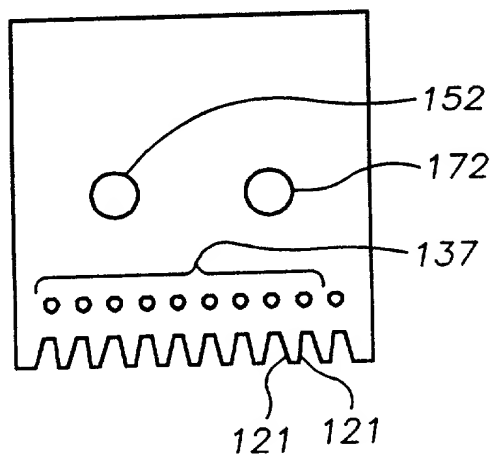


FIG. 3k

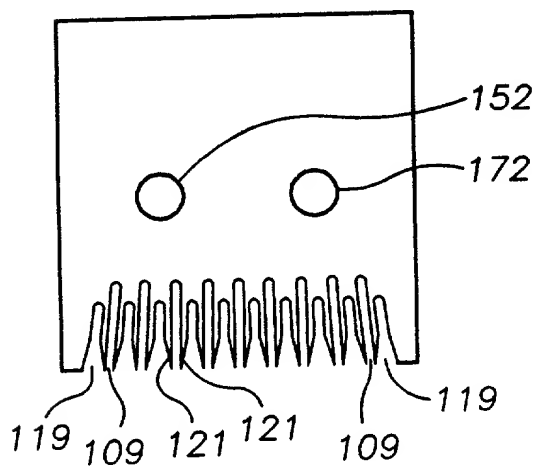


FIG.3m

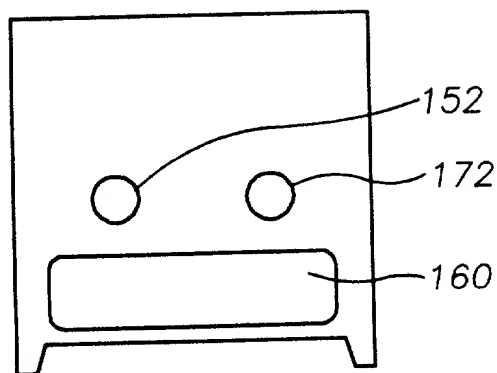


FIG.3n

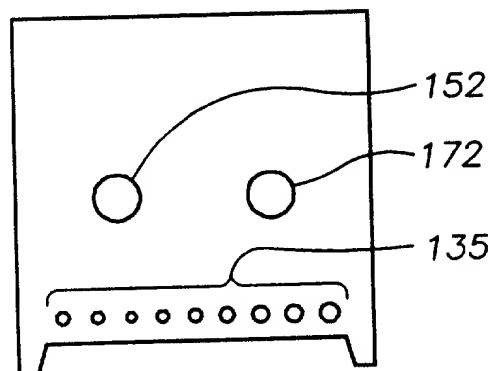


FIG.3p

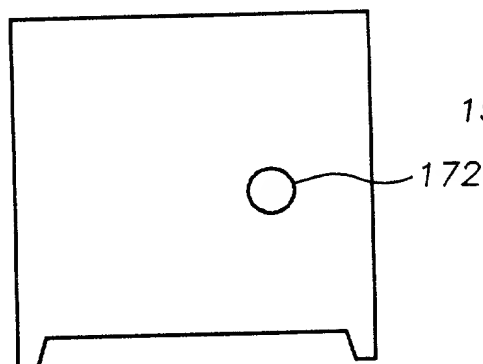


FIG.3o

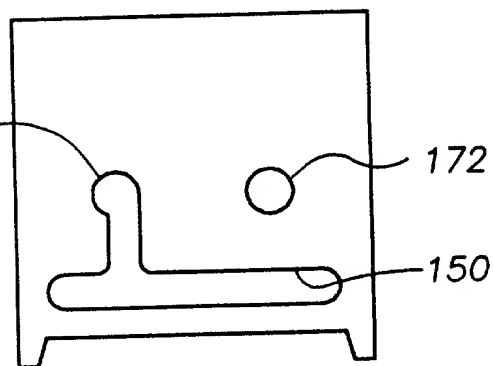


FIG.3q

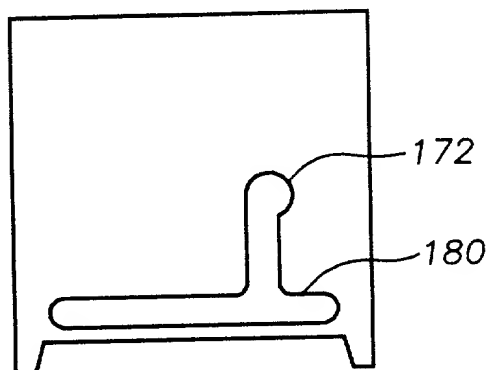


FIG.3r

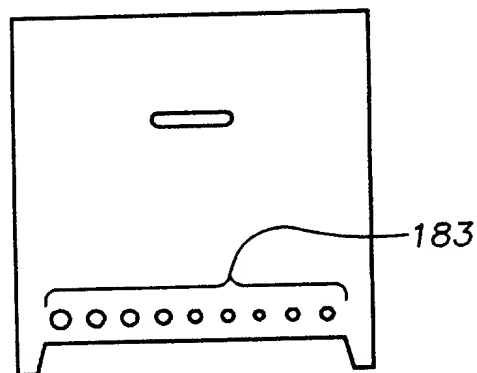


FIG. 3t

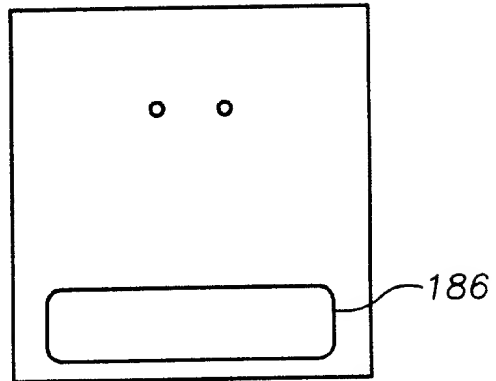


FIG. 3s

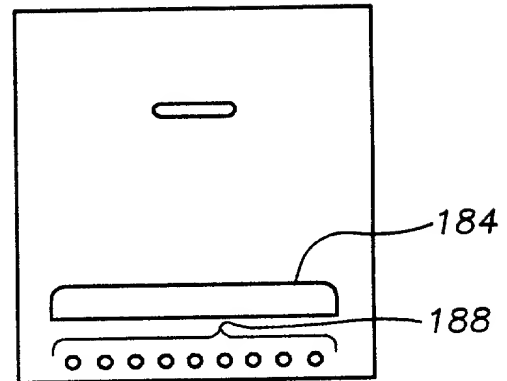


FIG. 3z

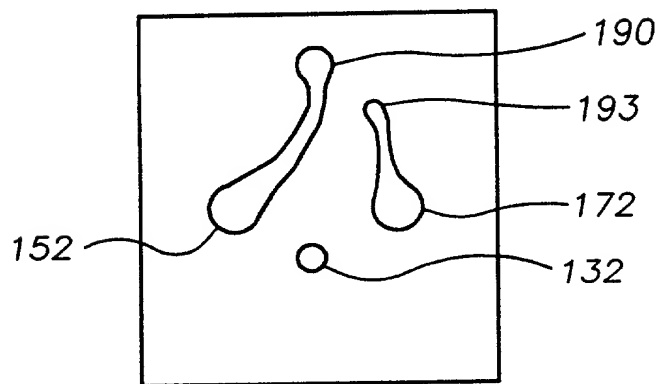


FIG.4a FIG.4b FIG.4c FIG.4d FIG.4e FIG.4f



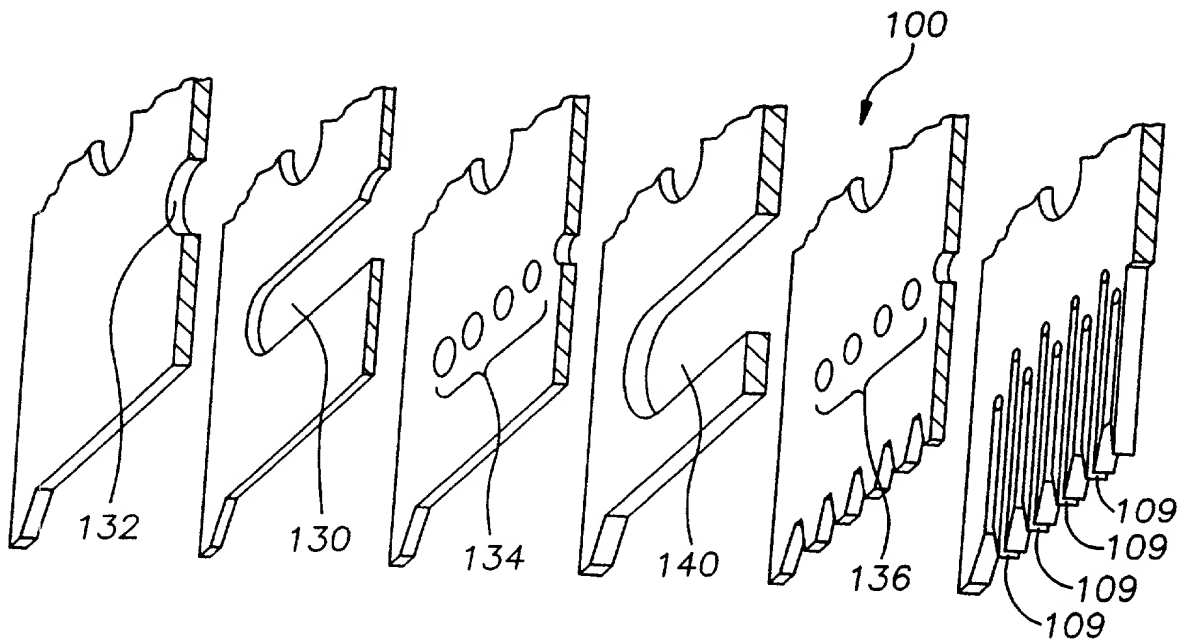


FIG.5



**FIG. 6**

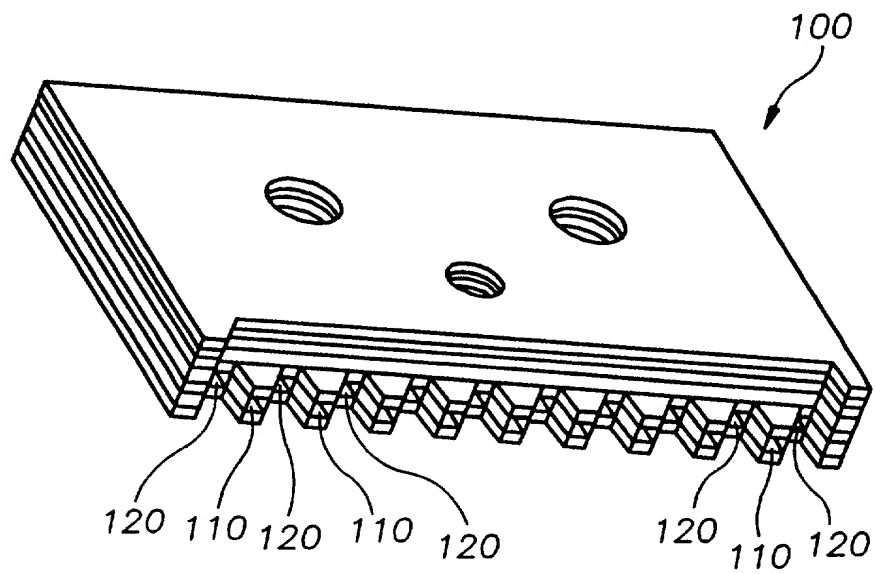

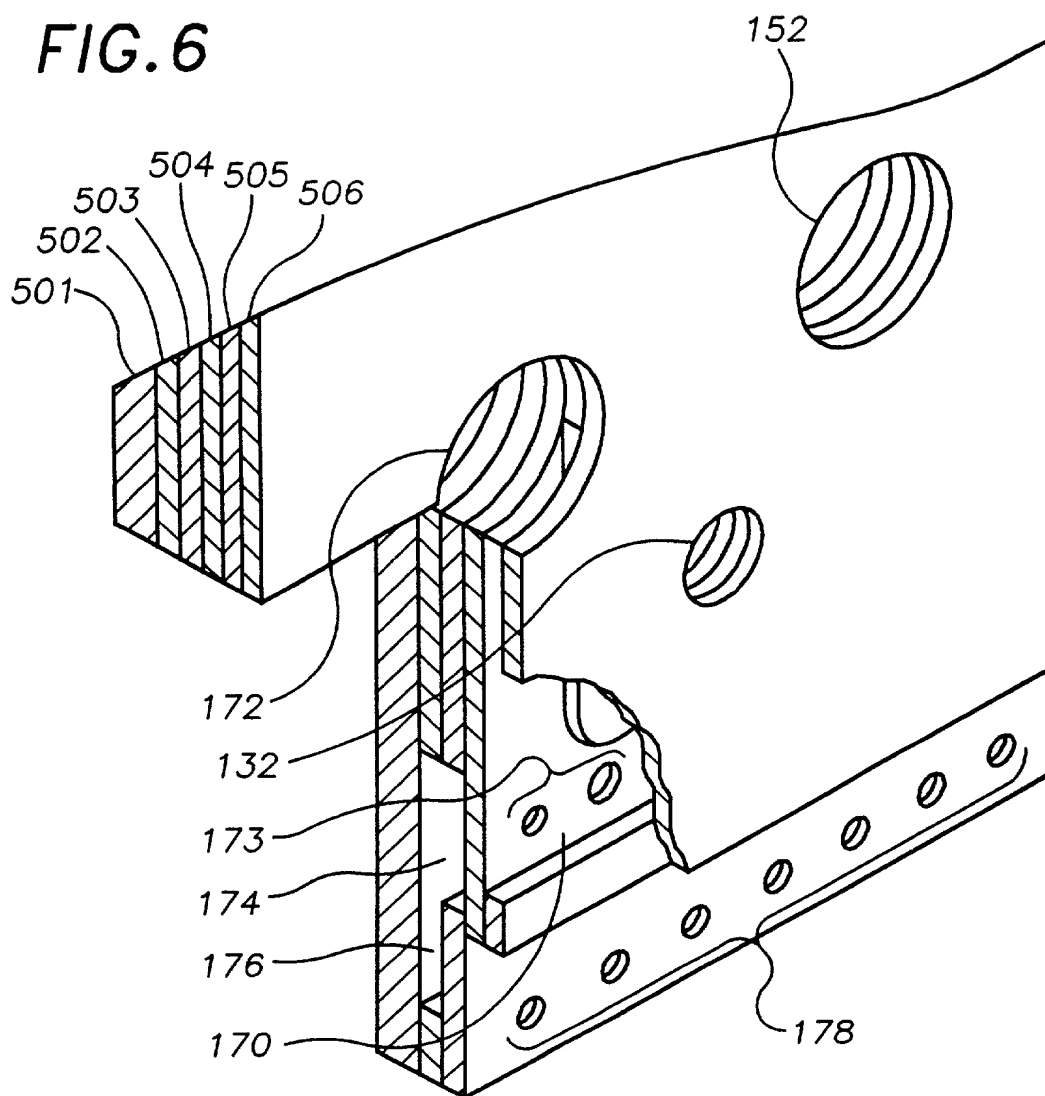

**COMBINED DECLARATION AND POWER OF ATTORNEY  
IN ORIGINAL PATENT APPLICATION**

As a below named inventor, I hereby declare that:

my residence, post office address and citizenship are as stated below next to my name;

I verily believe I am the original first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"MELTBLOWING METHOD AND APPARATUS"

which is described and claimed in:

☒ the attached specification; or

☐ in the application filed \_\_\_\_\_ Serial No. \_\_\_\_\_ and amended on \_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

☒ no such applications have been filed, or

☐ such application have been filed as follows:

Foreign Application(s), If Any, Filed Within 12 Months Prior To the Filing Date of This Application

Country \_\_\_\_\_ Application No. \_\_\_\_\_

Date of Filing \_\_\_\_\_ Priority Claimed Under 35 U.S.C. 119 Yes \_\_\_ No \_\_\_

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT International filing date of this application:

\_\_\_\_\_  
(Application Serial No.)

\_\_\_\_\_  
(Filing Date)

\_\_\_\_\_  
(patented pending abandoned)

Kui-Chiu KWOK  
"Meltblowing Method and Apparatus"

Attorney Docket No. 8010

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith, (list name and registration number):

THOMAS W. BUCKMAN (REG. NO. 25,756); DONALD J. BREH (REG. NO. 30,159);  
JOHN P. O'BRIEN (REG. NO. 22,764); MARK W. CROLL (REG. NO. 31,098).

Send Correspondence To:

Direct Telephone Inquiries To:

Mr. DONALD J. BREH  
Group Technology Counsel  
ILLINOIS TOOL WORKS INC.  
3600 West Lake Avenue  
Glenview, Illinois 60025-5811

DONALD J. BREH, ESQ.  
Telephone: (847) 657-4078

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

First Inventor: Kui-Chiu KWOK

Inventor's Signature: *Kui Chiu Kwok* Date: *Oct. 8, 1996*

Residence: 655 Woodhaven Drive, Mundelein, Lake County, Illinois 60060  
Citizenship: USA  
Post Office Address: 655 Woodhaven Drive, Mundelein, IL 60060